



BEXFX BLADE EXIT WITH LITHIUM BATTERY

Our double sided emergency Exit Signs are LIA certified and manufactured to provide full compliance to BS 60598-2-22 and ISO 7010.

The product can be wired for either maintained or non-maintained operations and is designed to IP20 Ingress protection. The product comes with ISO Arrow up legend along with a **Blank** for single sided use.


The luminaire can be recessed using the mounting kit.

Self-test versions can be remote controlled to enable functional and duration tests on demand, check the status of the battery, and programme the automated self-test at the time required.



Features:

- **5year warranty including batteries**
- Lithium ion battery (serviceable)
- Double sided self-contained emergency LED exit sign (c/w **Blank** for single sided use)
- Viewing distance 30m.
- Low stand-by power consumption < 0.5W (NM mode)
- Self-test and remote control versions available
- Maintained or non-maintained configurations as standard
- Ceiling or recessed mounting (350mm x 80mm cut out)
- Suitable for indoor applications
- IK07 & IP20 rated

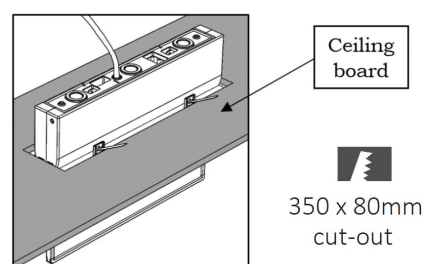

Cut-out for recessed version

Order Codes	
BEXFX-30M-MT	BEXFX BLADE EXIT (30M VIEWING DISTANCE) C/W ISO AU LEGEND
BEXFX-30M-AST	BEXFX BLADE EXIT (30M VIEWING DISTANCE) C/W ISO AU LEGEND, SELF TEST
BEXFX-LEG-ISOAD	BEXFX BLADE EXIT LEGEND ISO ARROW DOWN
BEXFX-LEG-ISOLR	BEXFX BLADE EXIT LEGEND ISO ARROW LEFT/RIGHT
BEXFX-RK	BEXFX BLADE EXIT RECESSING KIT
FXARC	ADVANCED REMOTE CONTROL


AST (Advanced Self-Test)

This is a self-test luminaire*. Functional test is carried out automatically once a week and runs for 30 seconds. Full duration test is carried out automatically every 52 weeks. First full duration test is carried out automatically within the first 4 weeks after the luminaire being connected to mains voltage. This luminaire can be used in conjunction with the Advanced Remote Control (FXARC). FXARC is an optional tool that adds extra features to AST emergency luminaires.

MT (Manual Test)

This luminaire needs to be tested and test results recorded by a competent person according to BS EN 50172:2004. This luminaire can be used in conjunction with the Advanced Remote Control (FXARC). FXARC is an optional tool that adds new features to AST and MT emergency luminaires. If functional test or full duration test is initiated via FXARC the MT luminaire will automatically switch to mains mode after the functional or full duration test is completed. This luminaire may have an integrated test button for quick functional test.

Note that MT emergency luminaires work independently from the remote control. FXARC remote control is an optional tool.

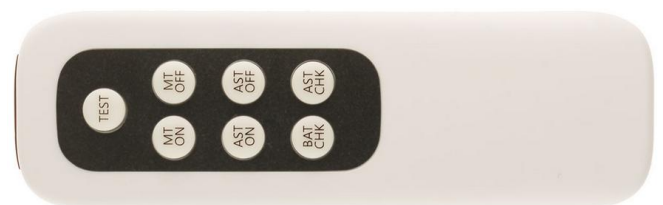

Advanced Remote Control (FXARC)

FXARC is a multifunction remote control suitable for MT and AST luminaire.

Our FXARC remote control provides the person responsible for the emergency lighting with the means to check battery life and the self-testing status; and carry out functional and full duration tests without needing the use of a ladder or a cherry picker – a key health and safety issue.