


Pacific- Low glare panel

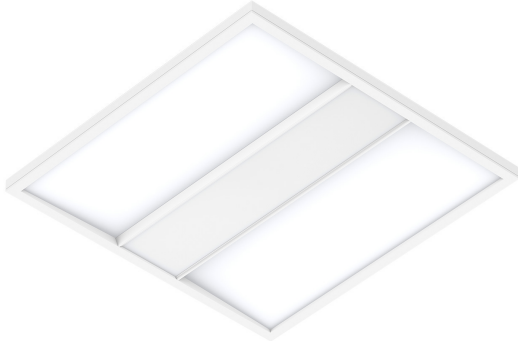

Description

Pacific High Efficiency Panels are an ideal specification product. Achieving efficiency of over 160lm per watt, low UGR and SCDM3 they tick all the boxes. Made with quality materials they offer good heat dissipation and performance. The panels come in 4000k as standard and have all dimmable options available.

Key Features

- SCDM3 as standard
- Dimmable and Emergency options available (Self test, Dali)
- UGR19
- Ultra efficiency at 160lm per watt. Light levels of standard 36w can be achieved with 19w.
- 5 years warranty.
- Plasterboard Clips available

Applications

- Carehomes
- Hospitals
- Offices
- Schools and public buildings

Electrical Information

Model No.	PA6625W4K-01	PA6636W4K-01		
Power Consumption(±5%)	25W	36W		
Power Supply	Philips or European brand			
Input Voltage	220-240 VAC, 50-60Hz			
Power Factor	>0.9			
Driver Type	Constant current European brand, 1-10v , Triac, Dali			

Optic Information

LED Type	SMD LED			
Luminous Flux (±10%)				
Efficacy(4000K Ra80)	2750lm	3960lm		
Efficiency	110lm per watt	110lm per watt		
CCT	4000k			
Color Rendering Index	Ra80			
Beam Angle	90 degrees			
Class	Class 1			

Dimensions and Mounting

Cut Out	580x580mm			
Dimensions	595x595x49mm			
Weight	1.5kg			
Output Voltage Range	42v			
Mounting Option	Recessed			
Material	Iron body Pmma diffuser			
Finish	Powder Coating			
Fixture Colour	White with microprismatic diffuser			
SCDM	<6			
IK Rating	IK06			
IP Rating	IP20			

Lifespan and Warranty

Operating Temperature	-10°C to + 40°C
Life Time of LED @Ta=25°C	> 70,000hrs L80B20
Warranty	5 years

Options

-05 Emergency

* Other options such as DALI, Self test etc are available